


IBYOUTLET Oilfield LLC
Unbeatable Quality & Price

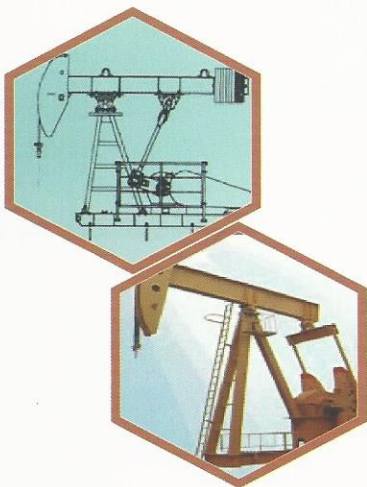

Pecos Pump Jacks
One Stop Shopping
Factory Direct Plus

Midland • Houston • Alberta

IBY




Introduction

We offer the best pump jacks with the best price in the world.

We currently hold certificates API 11E, Certificate of Quality Management (ISO9001:2000), Certificate of Environmental Management System (ISO-14000) and Certificate of Health and Safety System (ISO18000).

With over 40 years manufacturing experience, we have paid great attention to customers' requirements and quality management, designed 70 kinds of pump jacks, and possessed one patent of invention, two practical patents of creativity and 18 unique technologies.

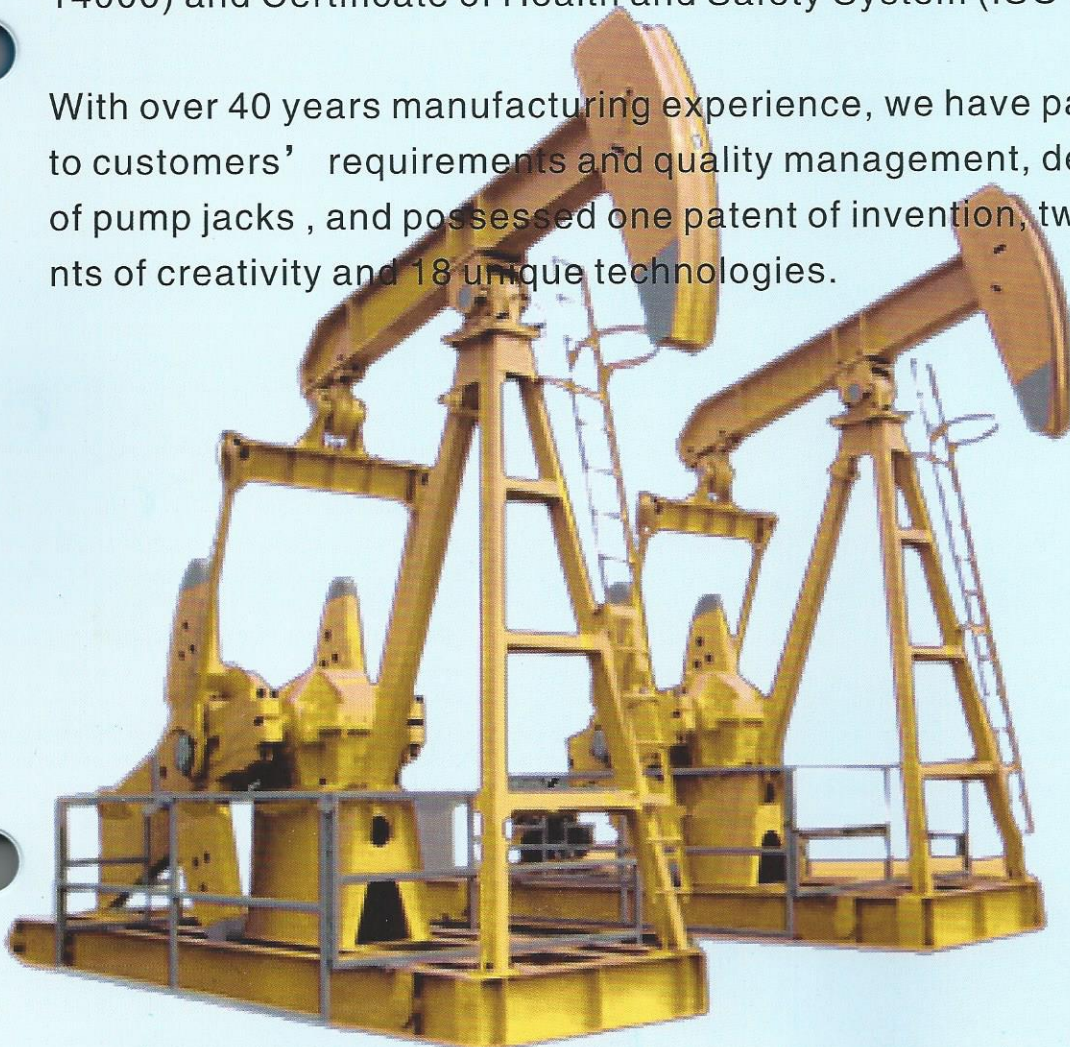

These units have conventional crank balance featuring a simple compact design, easy to maintain and adjust the balance.

Technical Data

Type	Pump rating (lb)	Stroke (in)	Frequency of stroke (SPM)	Reducer rating (lb. in)	Overall dimension (in)	Weight (lb)	Standard executed
16-53-30	5300	30,22	20,15,12	16000	181*79*108	5948	API 11E
25-67-36	6700	36,28,20	20,15,12	25000	190*83*126	6437	
40-89-42	8900	42,33,24	20,15,12	40000	196*87*134	6856	
40-76-48	7600	48,36,24	20,15,12	40000	205*87*152	7121	
57-76-42	7600	42,33,24	20,15,11	57000	196*87*134	7077	
57-89-42	8900	42,33,24	20,15,11	57000	196*87*136	7297	
57-95-48	9500	48,36,24	20,15,11	57000	204*87*151	7407	
57-109-48	10900	48,36,24	20,15,11	57000	204*87*151	7575	
57-76-54	7600	54,42.5,30	20,15,11	57000	189*87*169	7917	
80-109-48	10900	48,36,24	20,15,10	80000	205*87*152	8790	
80-133-48	13300	48,36,24	20,15,10	80000	205*87*152	8929	
80-119-54	11900	54,42.5,30	20,15,10	80000	224*91*169	8966	
80-133-54	13300	54,42.5,30	20,15,10	80000	223*91*169	8924	
80-119-64	11900	64,50,36	20,15,10	80000	249*91*181	9233	
114-133-54	13300	54,42.5,30	20,16,10	114000	230*93*168	10304	
114-173-54	17300	54,42.5,30	20,16,10	114000	230*93*168	9927	
114-143-64	14300	64,50,36	20,16,10	114000	258*93*168	10441	
114-173-64	17300	64,50,36	20,16,10	114000	258*93*168	10710	
114-143-74	14300	74,60.5,47.3	20,16,10	114000	274*91*216	11005	
114-173-74	17300	74,60.5,47.3	20,16,10	114000	274*91*216	11224	
114-119-86	11900	86,72,59	20,16,10	114000	282*91*206	12116	
114-119-100	11900	100,85,71	20,16,10	114000	323*91*244	14131	
114-143-100	14300	100,85,71	20,16,10	114000	323*91*244	14295	
160-143-64	14300	64,50,36	20,14,7	160000	256*93*170	13139	
160-173-64	17300	64,50,36	20,14,7	160000	268*106*187	13276	
160-143-74	14300	74,60.5,47.3	20,14,7	160000	274*106*216	14991	
160-173-74	17300	74,60.5,47.3	20,14,7	160000	274*106*216	15653	
160-200-74	20000	74,60.5,47.3	20,14,7	160000	274*106*216	15705	

IBY



Crank-balanced Pump Jacks

P2

These units have conventional crank balance featuring a simple compact design, easy to maintain and adjust the balance.

Technical Data

Type	Pump rating(lb)	Stroke(in)	Frequency of stroke (SPM)	Reducer rating (lb. in)	Overall dimension (in)	Weight (lb)	Standard executed
160-173-86	17300	86,72,59	20,14,7	160000	308*106*220	16534	API 11E
160-143-100	14300	100,85,71	20,14,7	160000	309*106*244	14295	
160-173-100	17300	100,85,71	20,14,7	160000	309*106*246	17240	
228-173-74	17300	74,60.5,47.3	20,13,6	228000	274*110*216	16093	
228-200-74	20000	74,60.5,47.3	20,13,6	228000	274*110*216	16850	
228-213-86	21300	86,72,59	20,13,6	228000	299*110*223	19136	
228-246-86	24600	86,72,59	20,13,6	228000	309*110*223	20146	
228-173-100	17300	100,85,71	20,13,6	228000	309*110*244	22024	
228-213-100	21300	100,85,71	20,13,6	228000	309*110*244	23148	
228-213-120	21300	120,98.5,77	20,13,6	228000	366*110*290	25353	
320-246-74	24600	74,60.5,47.3	20,12,5	320000	274*110*216	20944	
320-213-86	21300	86,72,59	20,12,5	320000	299*110*223	21215	
320-246-86	24600	86,72,59	20,12,5	320000	309*110*223	21715	
320-256-100	25600	100,85,71	20,12,5	320000	350*114*262	29145	
320-305-100	30500	100,85,71	20,12,5	320000	358*114*262	30163	
320-213-120	21300	120,98.5,77	20,12,5	320000	381*126*298	28616	
320-256-120	25600	120,98.5,77	20,12,5	320000	381*126*298	30101	
320-305-120	30500	120,98.5,77	20,12,5	320000	381*126*298	30836	
320-256-144	25600	144,122,100	20,12,5	320000	447*134*309	32024	
456-256-100	25600	100,85,71	16,10,4	456000	368*114*274	30600	
456-213-120	21300	120,98.5,77	16,10,4	456000	381*126*298	31327	
456-256-120	25600	120,98.5,77	16,10,4	456000	381*126*304	31878	
456-305-120	30500	120,98.5,77	16,10,4	456000	381*126*304	32269	
456-365-120	36500	120,98.5,77	16,10,4	456000	381*126*306	32826	
456-256-144	25600	144,122,100	16,10,4	456000	447*134*307	34899	
456-305-144	30500	144,122,100	16,10,4	456000	453*134*309	35915	
456-305-168	30500	168,144,122	16,10,4	456000	530*134*332	38316	
640-256-120	25600	120,98.5,77	16,10,4	640000	415*134*299	37127	


These units have conventional crank balance featuring a simple compact design, easy to maintain and adjust the balance.

Type	Pump rating(lb)	Stroke(in)	Frequency of stroke (SPM)	Reducer rating (lb. in)	Overall dimension (in)	Weight (lb)	Standard executed	
640-305-120	30500	120,98.5,77	16,10,4	640000	415*134*299	37456	API 11E	
640-365-120	36500	120,98.5,77	16,10,4	640000	415*134*306	38931		
640-305-144	30500	144,122,100	16,10,4	640000	531*134*306	40051		
640-365-144	36500	144,122,100	16,10,4	640000	531*134*309	41171		
640-305-168	30500	168,144,122	16,10,4	640000	603*138*331	43827		
640-365-168	36500	168,144,122	16,10,4	640000	609*138*339	45348		
912-365-144	36500	144,122,100	10,8,6	912000	562*148*306	49940		
912-427-144	42700	144,122,100	10,8,6	912000	562*148*306	50948		
912-305-168	30500	168,144,122	10,8,6	912000	609*148*337	52857		
912-365-168	36500	168,144,122	10,8,6	912000	609*148*337	54149		
912-365-192	36500	192,168,144,120	10,8,6	912000	633*148*339	54850		
912-427-192	42700	192,168,144,120	10,8,6	912000	633*148*339	55842		
912-305-240	30500	240,216,192,168	10,8,6	912000	680*148*387	56389		
1280-365-192	36500	192,168,144,120	10,8,6	1280000	639*150*344	63150		
1280-427-192	42700	192,168,144,120	10,8,6	1280000	639*150*354	63847		
1280-305-240	30500	240,216,192,168	10,8,6	1280000	690*150*408	64392		

Crossbeam Balance Pump Jacks

Technical Data							
Type	Pump rating	Stroke	Frequency of stroke	Reducer rating	Overall dimension	Weight	Standard executed
16-53-30	5300	30,22	20,15,12	16000	149*79*99	3481	API 11E
25-67-36	6700	36,28,24	20,15,12	25000	134*83*128	4392	
40-89-42	8900	42,33,24	20,15,10	40000	158*87*132	6188	
40-76-48	7600	48,36,24	20,15,10	40000	188*87*127	9136	
57-109-48	10900	48,36,24	20,15,12	57000	204*87*151	7928	
57-109-54	10900	54,42,30	20,15,12	57000	206*87*130	7405	

Gear Reducer

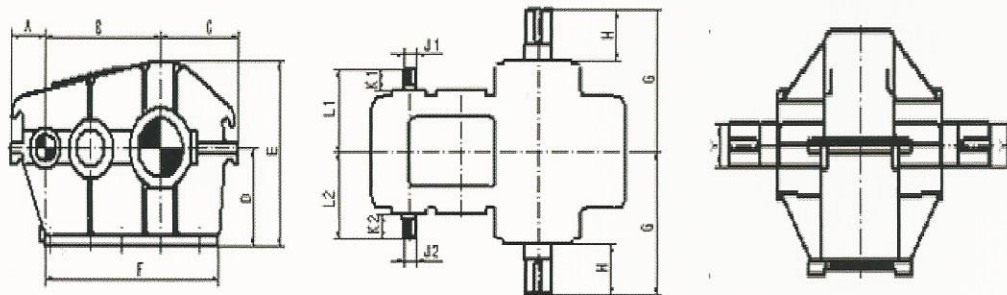

All parts are available in our Midland, Houston and Canada warehouse.

Technical Data

Parameter	D16	D25	D40	D57	D80	D114	D160	D228	D320	D456	D640	D912
A	4.92	4.92	6.46	5.71	5.91	6.10	8.86	8.86	8.96	11.32	9.84	9.84
B	13.78	13.78	17.72	19.69	21.65	23.62	25.59	29.53	35.43	41.34	41.34	47.24
C	10.63	10.63	13.15	13.58	14.57	15.35	17.91	20.08	21.36	27.03	27.95	29.92
D	9.45	11.02	12.20	13.39	13.78	16.14	16.54	18.90	22.05	24.41	25.98	29.53
E	17.99	19.57	22.91	25.20	26.30	29.45	31.50	35.59	40.75	48.03	49.88	56.69
F	18.11	18.11	25.59	25.59	25.59	31.50	43.90	44.88	49.21	57.48	66.46	66.93
G	18.31	19.37	21.06	21.26	24.21	24.80	29.92	31.89	33.94	38.19	43.09	44.49
H	7.97	8.96	8.46	8.46	10.63	10.49	11.02	11.12	14.17	16.14	16.85	17.13
Y	2.76	3.15	3.54	3.54	3.54	4.33	4.72	6.10	6.89	7.09	7.87	8.66
J1	0.98	1.24	1.50	1.50	1.50	2.17	2.50	2.87	3.35	3.54	4.00	4.13
J2	0.98	1.24	1.50	1.50	1.50	2.17	2.50	2.87	3.35	3.54	4.00	4.13
K1	3.21	3.21	3.54	3.74	4.45	5.00	5.04	4.69	5.47	8.37	5.51	6.10
K2	3.09	3.21	3.54	3.54	3.46	4.96	4.57	4.69	5.47	8.37	8.86	9.45
L1	10.73	11.81	12.20	12.40	14.88	15.18	18.66	18.78	20.75	25.30	27.72	29.33
L2	10.61	11.81	12.20	12.20	13.90	15.14	18.19	18.78	20.75	25.30	27.32	29.33
Reducer ratio	27.36	31.02	32.16	31.49	31.747	28.676	28.964	30.316	28.15	31.52	28.36	28.8
Weight (lb)	811	845	1384	1574	1861	2720	3907	5009	6418	9590	11023	15653
Pulley diameter	14.69	15.75	20.08	24.41	25.98	29.53	32.48	36.02	40.94	44.49	50.39	47.24
Groove number	2B	2B	2C	3C	3C	3C	4C	4C	5C	5C	6C	7C
<i>All dimensions are in inches</i>												




PECOS

8-2866D

W18-2866D

P6

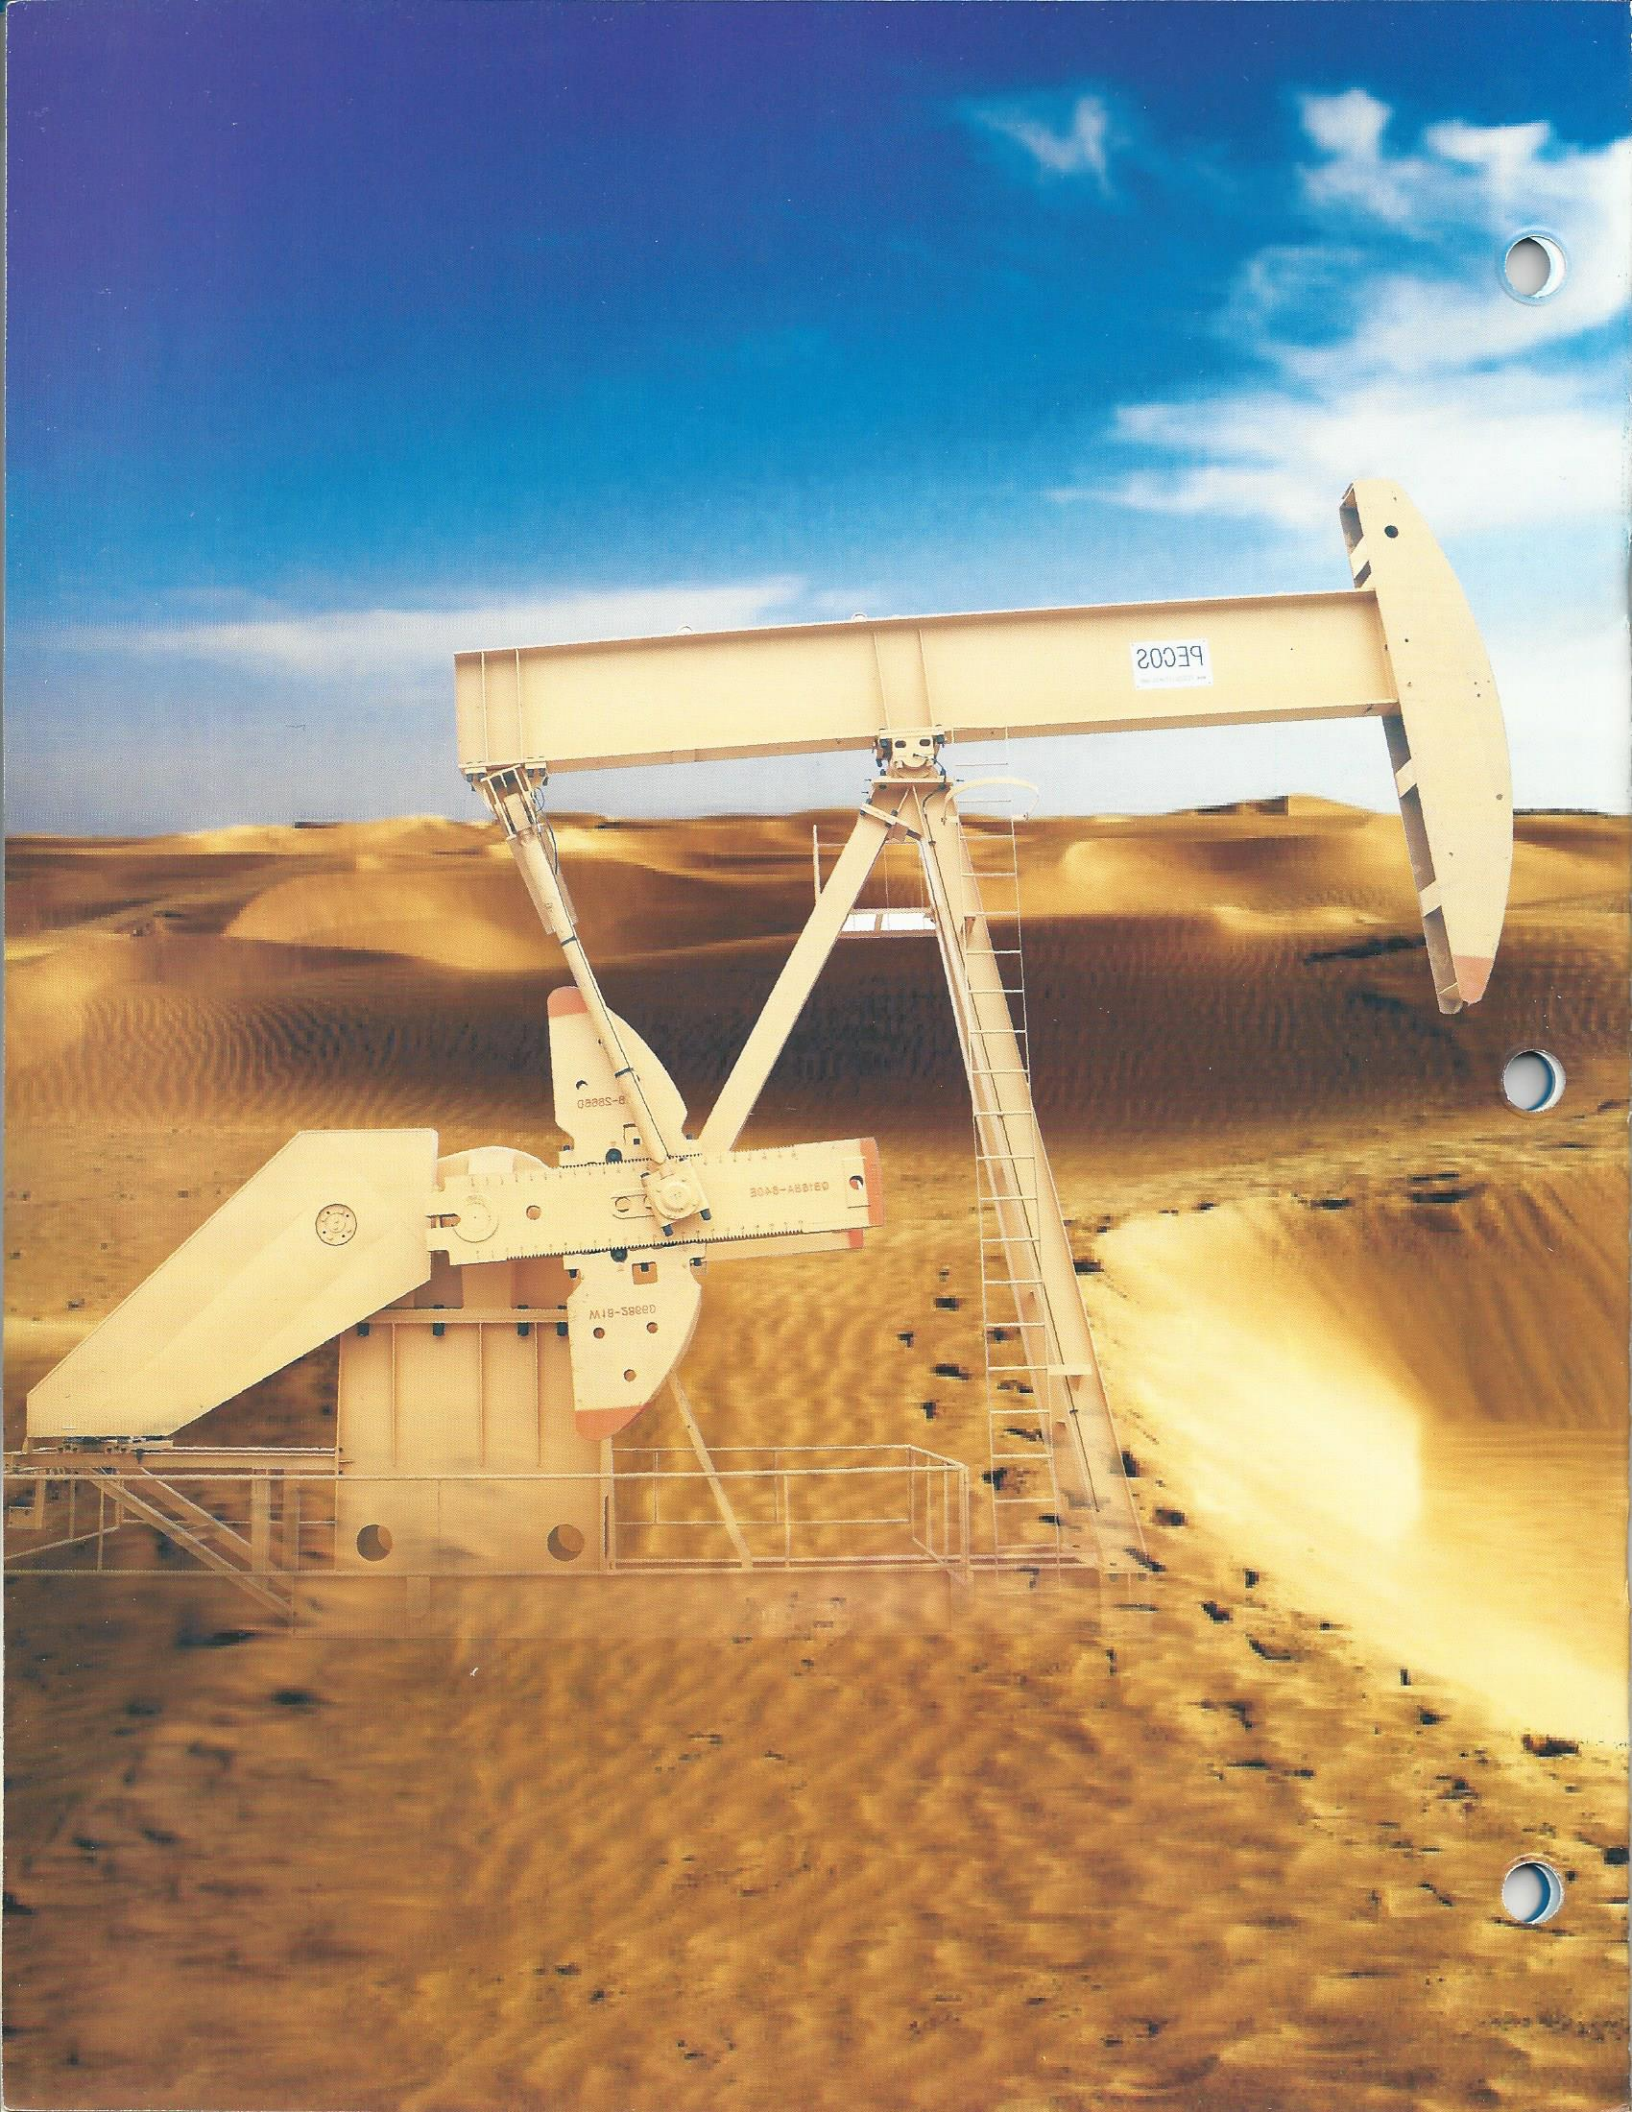


20039

B-3880

2048-881ED

M18-3880D

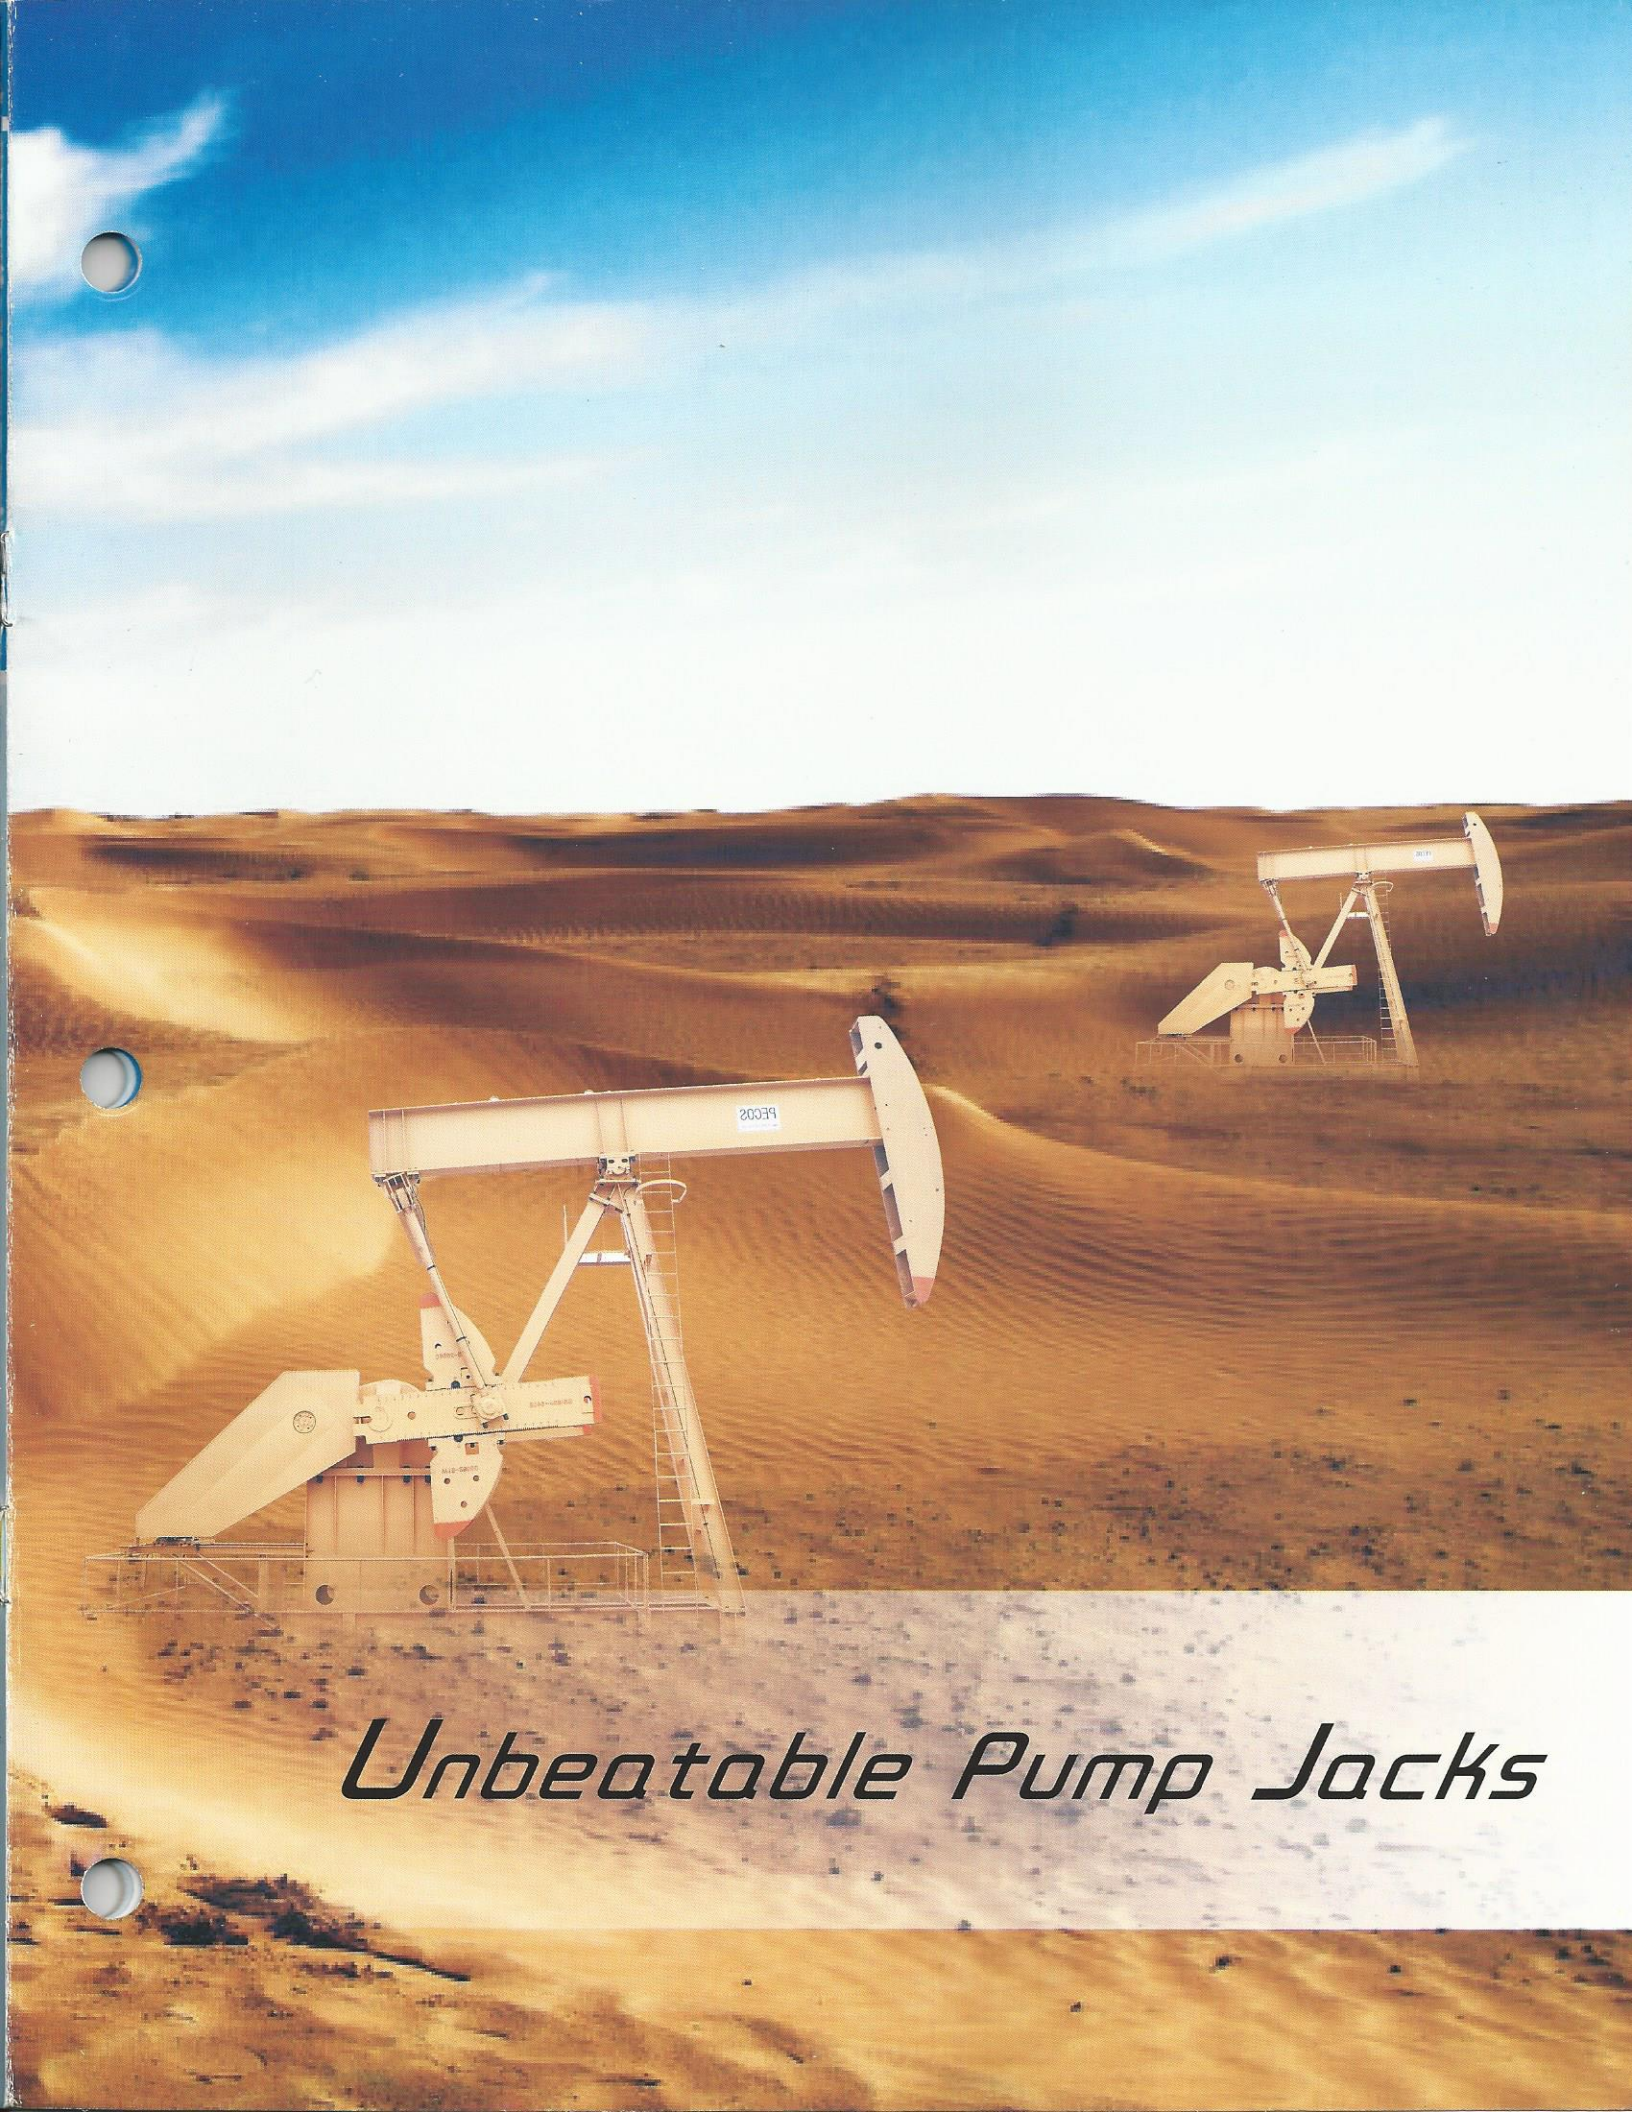

Unbeatable Pump Jacks



IBYOUTLET Oilfield LLC
Unbeatable Quality & Price

Houston 281-440-5555 Midland 432-614-1168
Alberta 780-463-6425 Quote@ipayless2.com
www.**IBYOUTLET**.com